

E.M.I. Suppressors Ferrite Rod Cores

1 Applications

Rod cores are used for coils which do not require adjustments.
Rod chokes are widely used in Power Supply Applications




2 Materials

Ly1C, Ly3A, Ly3B
Ly5B, Ly6, Ly8

3 Order Codes

Ly5A I 31 X 7
Material Type OD H

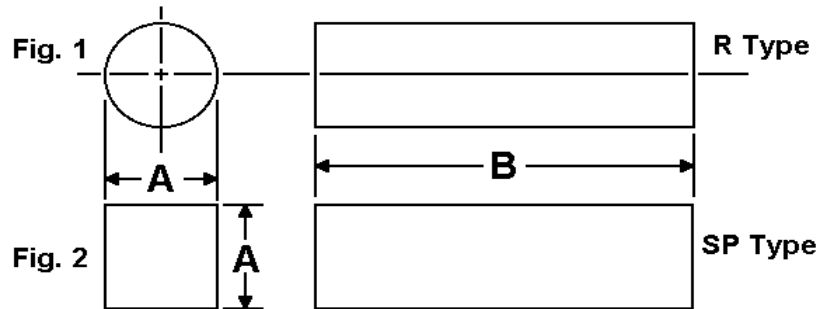

4 Dimensions

Item (Pt. No.)	A	+/-	B	+/-	Fig.
SP 1.6 x 1.6 x 6.6	1.6	0.1	6.6	0.2	2
R 1.8 x 5	1.8	0.1	5.0	0.2	1
R 2 x 10	2.0	0.1	10.0	0.3	1
R 3 x 10	3.0	0.1	10.0	0.3	1
R 3 x 18	3.0	0.1	18.0	0.4	1
R 5 x 16	5.0	0.15	16.0	0.4	1
R 5 x 20	5.0	0.15	20.0	0.5	1
R 5 x 25	5.0	0.15	25.0	0.6	1
R 6 x 10	6.0	0.15	10.0	0.3	1
R 6 x 15	6.0	0.15	15.0	0.4	1
R 6 x 20	6.0	0.15	20.0	0.5	1
R 6 x 25	6.0	0.15	25.0	0.6	1
R 6 x 30	6.0	0.15	30.0	0.8	1
R 6.35 x 20	6.35	0.15	20.0	0.5	1
R 6.35 x 25	6.35	0.15	25.0	0.6	1
R 6.35 x 30	6.35	0.15	30.0	0.8	1
R 6.35 x 35	6.35	0.15	35.0	0.8	1

Item (Pt. No.)	A	+/-	B	+/-	Fig.
R 3.6 x 20	3.6	0.1	20.0	0.5	1
R 4 x 14	4.0	0.1	14.0	0.3	1
R 4.0 x 20	4.0	0.1	20.0	0.5	1
R 4.0 x 25	4.0	0.1	25.0	0.6	1
R 5.0 x 15	5.0	0.15	15.0	0.4	1
R 6.5 x 15	6.5	0.15	15.0	0.5	1
R 6.5 x 35	6.5	0.15	35.0	0.6	1
R 6.5 x 30	6.5	0.15	30.0	0.8	1
R 6.5 x 35	6.5	0.15	35.0	0.8	1
R 8 x 10	8.0	0.15	10.0	0.3	1
R 8 x 20	8.0	0.15	20.0	0.5	1
R 8 x 25	8.0	0.15	25.0	0.6	1
R 8 x 30	8.0	0.15	30.0	0.8	1
R 8 x 32	8.0	0.15	32.0	0.8	1
R 10 x 20	10.0	0.2	20.0	0.5	1
R 10 x 30	10.0	0.2	30.0	0.8	1
R 10 x 35	10.0	0.2	35.0	0.8	1

Lengths can be changed to suit Custom Requirements

All Dimensions are in mm